



Interior Work





Special products for fixing chipboards and for fastening attachments in plasterboard, masonry or concrete

At home in many trades

Overview of our catalogues

Whether for professional applications on building facades or for anchoring solutions of technical facilities inside the building – EJOT offers the right fastening solution for every application.

Besides our comprehensive General Catalogue Building Fasteners, we offer you further catalogues on our business fields in addition to the individual catalogue Interior Work. Unlike the printed general catalogue, the individual catalogues are available exclusively in digital form.

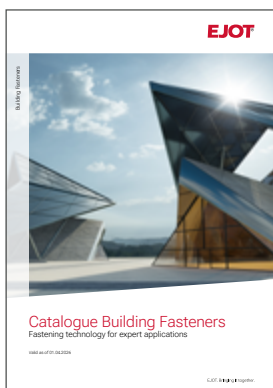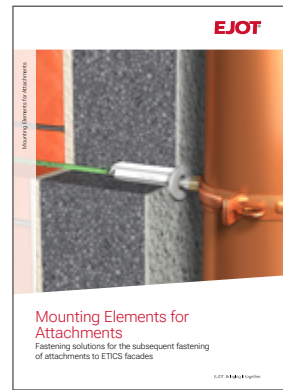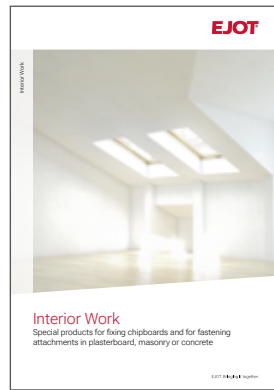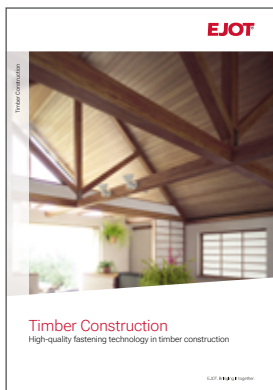

General Catalogue Building Fasteners 2025/2026

You can find the current catalogue online as a PDF version.

You can find a digital overview of our catalogues here:



www.ejot.com/catalogues

Product overview

EJOFAST® self-drilling screws

JF2 (steel)

JF2-2-4.2xL 4

Ceiling nails

Steel

E-CN 6xL 5

All wall plugs

Plastics

Gripper 6

Spacers

Plastics

AS 7

Fasteners for ceiling insulation

Insulation screw for direct installation into concrete (steel)

DDS-7.3xL white 8

DDS-7.3xL beige 8

Ceiling insulation washer (steel)

DDT 70 mill finish 9

Machinery

Cordless screwdriver

ASCM 18 QSW AS 11

Cordless hammer drill ABH

ABH 18-26 AS 12

Tools

Hammer drill SDS plus®

4-edge SDS-plus 13

Bits

Hexalobular TX 14

Socket wrench inserts

Hexagon clamping socket 15

EJOFAST® self-drilling screw JF2-2-4.2



Application range

- > Efficient fixing of steel air ducts

Properties

- > Case-hardened steel, protected against corrosion
- > Fastening with reduced swarf
- > No cleaning of the ventilation ducts from drilling chips
- > Non-skid application

Querverweise Seite

Cordless screwdriver	
ASCM QSW	11
Socket wrench insert SW7	15

Assembly instruction



Product in the online shop




EJOFAST

Applications



Technical specifications



Certifications



Order description	Length [mm]	Clamping thickness [mm]	PU [pieces]	Price/100 [EUR]	Article number	EAN
JF2-2-4.2x13	13	0-5	1000		7381300609	4061245014227
JF2-2-4.2x16	16	0-8	1000		7381600609	4061245014210

Ceiling nail



Querverweise	Seite
Cordless hammer drill ABH	12
Hammer drill SDS plus®	13

Application range

- > For use as a multiple fastener of non-supporting systems in concrete
- > Approved for concrete strengths from C20/25 to C50/60

Properties

- > Zinc-plated steel
- > High load-bearing capacity in cracked and non-cracked concrete
- > Small drill hole diameter
- > Fast and reliable installation


Characteristic values without fire exposure

Min. component thickness h_{\min}	80 mm
Edge distance c_{\min}	150 mm
Centre distance s_{\min}	200 mm

Applications



Technical specifications



Certifications



Product in the online shop



Order description	Length [mm]	Max. attachment thickness t_{fix} [mm]	PU [pieces]	Price/100 [EUR]	Article number	EAN
Ceiling Nail E-CN 6x40	40	5	100		9700050100	4061245093406
Ceiling Nail E-CN 6x70	70	35	100		9700050101	4061245093413

GRIPPER all-wall plug



Querverweise	Seite
Cordless screwdriver	
ASCM QSW	11
Hammer drill SDS plus®	13

Application range

- > For pre-positioned installation in boards, cavity and solid walls as well as in any other construction material

Application examples

- > Hand rails
- > Wall attachment of cabinets
- > Ceiling lights
- > Storage racks
- > Bookcases
- > Mounting televisions
- > Radiators
- > Wash basins
- > Urinals
- > Electrical installations
- > Attachment of HVAC and sanitary equipment
- > Attachment of sanitary equipment

Properties

- > Plug made of thermoplastic elastomer - the material adapts to the surface of the drill hole, while the non-slip GripEdge surface and the screws ensure secure mechanical embedment
- > GRIPPER surpasses normal plugs in its power of resistance against long-term stress, wear, weather conditions, moisture and storage
- > Can be used with all common types and diameters of screws
- > The special collar keeps the plug at the optimal installation depth and also remains covered by the screw head

Applications





Base materials

Suitable for

- > Aerated concrete block
- > Plasterboard
- > High-strength plasterboard
- > Hollow light expanded clay aggregate block
- > Pre-stressed hollow core slab
- > Natural stone
- > Non-cracked concrete
- > Vertically perforated brick
- > Perforated sand-lime brick
- > Solid clay brick
- > Solid light expanded clay aggregate block
- > Solid sand-lime brick

Applications



Product in the online shop



Appropriate screws	Diameter [mm]	Length [mm]
Gripper 6	4- 5.5	32 + t _{fix}
Gripper 8	4.5-6	38 + t _{fix}
Gripper 10	4.5-7	45 + t _{fix}

Order description	L [mm]	d ₀ [mm]	h ₁ ≥ [mm]	t _{sheet, min} [mm]	PU [pieces]	Price/100 [EUR]	Article number	EAN
Gripper 6 all wall plug	32	6	38	8	100		9650075232	4061245003146
Gripper 8 all wall plug	38	8	44	12	50		9650075234	4061245003139
Gripper 10 all wall plug	45	10	50	12	50		9650075236	4061245003122

AS spacer




Application range

- > To compensate for tolerances on wall and roof
- > All-purpose for anchor diameters of 6/8/10 mm

Characteristics

- > Plastics
- > Easy installation through clipping-on from the side
- > Variable combinations

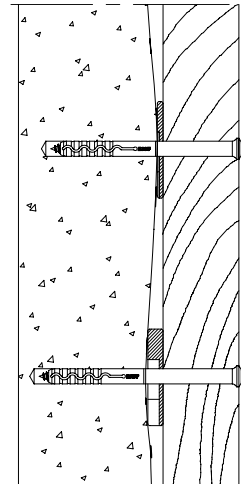

Product in the online shop



Order description	Width [mm]	Height [mm]	Thickness [mm]	PU [pieces]	Price/100 [EUR]	Article number	EAN
AS-3	50	50	3	100		8600725700	7612336001557
AS-5	50	50	5	100		8601189710	4039161005278
AS-8	50	50	8	100		8601233720	4039161005292
AS-10	50	50	10	100		8601232750	4039161005308
AS-15	50	50	15	100		8601187730	4039161005315

Insulation screw for direct installation into concrete DDS



Querverweise **Seite**

Ceiling insulation washer DDT	9
Cordless hammer drill ABH	12
Hammer drill SDS plus®	13
Bit hexalobular TX30	14

Application range

- > For fastening ceiling insulation and acoustic insulation into concrete substrates
- > Particularly suitable for multi-layer boards with magnesite- or cement-bonded wood wool
- > Top layer with EPS or mineral wool core

Properties


- > Easy installation: drill, fasten, done!
- > Small embedment depth
- > Injection-moulded screw heads with wood wool structure in beige or white for visually unobtrusive fastening



Applications



Technical specifications



Certifications



Product in the online shop



Order description	Length [mm]	PU [pieces]	Price/100 [EUR]	Article number	EAN
Colour white					
EJOT DDS 7.3x75 white	75	100		8419075740	4039161005407
EJOT DDS 7.3x85 white	85	100		8419085740	4039161005414
EJOT DDS 7.3x100 white	100	100		8419100740	4039161005421
EJOT DDS 7.3x125 white	125	100		8419125740	4039161005438
EJOT DDS 7.3x150 white	150	100		8419150740	4039161005452
EJOT DDS 7.3x175 white	175	100		8419175740	4039161005469
Colour beige					
EJOT DDS 7.3x75 beige	75	100		8419075780	7612336177962
EJOT DDS 7.3x85 beige	85	100		8419085780	7612336177979
EJOT DDS 7.3x100 beige	100	100		8419100780	7612336177986
EJOT DDS 7.3x125 beige	125	100		8419125780	7612336001410
EJOT DDS 7.3x150 beige	150	100		8419150780	7612336177993
EJOT DDS 7.3x175 beige	175	100		8419175780	7612336178006

Further lengths upon request



Ceiling insulating washer DDT



Application range

> In combination with EJOT DDS insulation screw for direct assembly into concrete to increase the washer diameter for soft insulation materials

Applications



Cross references page

Insulation screw for direct installation into concrete DDS 8

Technical specifications



Product in the online shop



Order description	PU [pieces]	Price/100 [EUR]	Article number	EAN
EJOT DDT 70 mill finish	500		8721070700	4039161006978

Machinery Spare Parts Tools

Cordless screwdriver ASCM 18 QSW AS



Included in delivery

- 1 ASCM 18 QSW AS
(without battery pack or battery charger)
- 1 plastic tool case
- 1 scaffolding anchor
- 1 socket for hexagon screws SW 8
- 1 removable full metal drill chuck

Application range

- > Torque-optimized cordless screwgun with four gears for fixing metal with screw diameters of up to 6.0 mm

Characteristics

- > 4-gear full metal gear unit
- > Mechanical torque adjustment
- > Tool-free change of QuickIN attachments between applications in seconds
- > Brushless FEIN PowerDrive motor with 30 % higher efficiency enables longer service life
- > Compatible with AMPShare / Bosch Professional 18 V batteries

Technical specifications

Battery voltage	18 V
Li-Ion / ProCORE Li-Ion	Li-Ion / ProCORE Li-Ion
Motor	brushless
Gear	4-gear
Idle speed	400 / 700 / 1400 / 2500 1/min
Max. torque (hard/soft)	40 / 30 Nm
Torque levels	20 + 1
Drill chuck clamping range	1.5 – 13 mm
Screws	8 x 200 mm
Drill Ø timber	40 mm
Drill Ø steel	13 mm
Battery pack	not included in delivery

3-year FEIN PLUS Warranty
including battery and charger
(if registered online)

Product in the online shop



Order description	PU [pieces]	Price/1 [EUR]	Article number	EAN
4-gear cordless screwgun ASCM 18-QSW AS	1		9150660000	4014586898919
Accessories				
QuickIN Bithalter ASCM 18-4 QM AS / 18-QSW AS	1		9150610001	4014586404820
QuickIN Socket adapter ASCM 18-4 QM AS / 18-QSW AS	1		9150610002	4014586404844
QuickIN depth stop ASCM 18-4 QM AS / ASCM 18-QSW AS	1		9150610003	4014586476902

Cordless hammer drill ABH 18-26 AS



Included in delivery

- 1 ABH 18-26 AS
(without battery pack or battery charger)
- 1 handle
- 1 depth stop
- 1 machine cloth
- 1 plastic tool case

Application range

- > For drilling up to 26 mm in concrete

Characteristics

- > Rapid work progress thanks to brushless motor with high impact energy – fast construction progress and high chisel removal rate
- > Protection for the user and tool by means of safety clutch and overload protection
- > Electronic Precision Control (EPC) - perfect handling and control for sensitive materials and challenging surfaces
- > Fatigue-free working thanks to compact design and few vibrations
- > Compatible with AMPShare / Bosch Professional 18 V batteries

3-year FEIN PLUS Warranty
including battery and charger
(if registered online)

Technical specifications

Battery voltage	18 V
Battery compatibility	Li-Ion / ProCORE Li-Ion
Motor	Brushless
Idle speed	0 – 980 rpm
Impacts	0 – 4350 rpm
Impact energy	2.6 J
Tool holder	SDS-plus
Drill Ø concrete	26 mm
Drill Ø masonry	68 mm
Drill Ø steel	13 mm
Drill Ø timber	30 mm
Weight without battery	3.20 kg
Battery pack	Not included in delivery

Product in the online shop



Order description	PU [pieces]	Price/1 [EUR]	Article number	EAN
Cordless hammer drill ABH 18-26 AS	1		9150650000	4014586897264

Hammer drill SDS plus®




Application range

- > For masonry, concrete, natural stone, artificial stone, etc.

Advantages

- > Long service life
- > Centering point for easy, pinpoint drilling
- > Short spiral starts for optimised drill dust transport
- > Radially shaped reinforcement protection against hooking in case of reinforcement hits
- > 4x4 design allows precise concentricity and minimizes wear and friction losses
- > High-quality hardened and tempered steel for the toughest applications

Technical specifications



Product in the online shop




Order description	D [mm]	L1 [mm]	L2 [mm]	PU [pieces]	Price/1 [EUR]	Article number	EAN
4 edges							
4 edge SDS-plus 5x160	5.0	160	100	1		9270005160	4061245080208
4-edge SDS-plus 5x260	5.0	260	200	1		9270005060	4061245080314
4-edge SDS-plus 5x410	5.0	410	350	1		9270005350	4061245080239
4-edge SDS-plus 6x160	6.0	160	100	1		9270006160	4061245080253
4-edge SDS-plus 6x260	6.0	260	200	1		9270006260	4061245080277
4-edge SDS-plus 8x160	8.0	160	100	1		9270008160	4061245080284
4-edge SDS-plus 8x260	8.0	260	200	1		9270008260	4061245080307
4-edge SDS-plus 8x360	8.0	360	300	1		9270008360	4061245080338
4-edge SDS-plus 8x600	8.0	600	540	1		9270008600	4061245080369
4-edge SDS-plus 10x160	10.0	160	100	1		9270010160	4061245080376
4-edge SDS-plus 10x260	10.0	260	200	1		9270010260	4061245080390
4-edge SDS-plus 10x360	10.0	360	300	1		9270010360	4061245081137
4-edge SDS-plus 10x460	10.0	460	400	1		9270010460	4061245080406
4-edge SDS-plus 12x160	12.0	160	100	1		9270012160	4061245081144
4-edge SDS-plus 12x260	12.0	260	200	1		9270012260	4061245081151
4-edge SDS-plus 14x160	14.0	160	100	1		9270014160	4061245081175
4-edge SDS-plus 14x310	14.0	310	250	1		9270014310	4061245081267
4-edge SDS-plus 15x160	15.0	160	100	1		9270015160	4061245081199
4-edge SDS-plus 16x260	16.0	260	200	1		9270016260	4061245081212

Further lengths upon request



Hexalobular bit TX



Application range

> For fastening of all EJOT fasteners with hexalobular drive TX

Technical specifications



Product in the online shop



Order description	Drive and Size	Length [mm]	PU [pieces]	Price/1 [EUR]	Article number	EAN
Drive: 1/4" hexagon DIN/ISO 1173 - C 6.3						
TX20-1/4"/Cx25	TX20	25	1		9150010000	4050623100553
TX20W-1/4"/Cx25*	TX20W	25	1		9150008000	4050623100744
TX25-1/4"/Cx25	TX25	25	1		9150009000	4061245021072
TX25W-1/4"/Cx25*	TX25W	25	1		9150003000	4061245021102
TX30-1/4"/Cx25	TX30	25	1		9250431000	4050623100584
TX30W-1/4"/Cx25*	TX30W	25	1		9250431002	4050623100775
TX40-1/4"/Cx25	TX40	25	1		9250480000	4050623100591
Drive: 1/4" hexagon DIN/ISO 1173 - E 6.3						
TX25HF-1/4"/Ex50**	TX25	50	1		9506008401	4013288106926
TX25-1/4"/Ex300	TX25	300	1		9252014300	4061245075457
TX25-1/4"/Ex350	TX25	350	1		9252014350	4061245105611
TX30-1/4"/Ex50	TX30	50	1		9250431001	4050623102670
TX30-1/4"/Ex200	TX30	200	1		9253014200	4039161010975
TX30-1/4"/Ex350	TX30	350	1		9253014350	4061245021096
Drive: threaded connection M6						
TX25-M6x33	TX25	33	1		9250251425	4061245021089
TX30-M6x33	TX30	33	1		9250251430	4050623103936

* Special bit: conical design for force fit at screw head of painted screws

**Bit with holding function for unpainted screws

Socket wrench insert



Application range

- > For fastening of all EJOT fasteners with hexagon head

Characteristics

- > Clamping spring with ball
- > Secure fit of the screw

Technical specifications



Cross references

	page
Cordless screwdriver ASCM QSW	11

Order description	Drive and Size	Length [mm]	PU [pieces]	Price/1 [EUR]	Article number	EAN
Drive: 1/4" hexagon DIN/ISO 1173 - E 6.3						
K-SW7-1/4"x50 with ball and flat spiral spring	SW7	50	1		9250705106	4061245019987
K-SW8-1/4"x50 with ball and flat spiral spring	SW8	50	1		9250705104	4061245020006
K-SW3/8"-1/4"x50 with ball and flat spiral spring	SW3/8"	50	1		9250705105	4061245019994
K-SW10-1/4"x50 with ball and flat spiral spring	SW10	50	1		9250705102	4061245020020
K-SW13-1/4"x50 with ball and flat spiral spring	SW13	50	1		9250705103	4061245020013
S-SW17-1/4"x65	SW17	65	1		9250705107	4061245021119


Product in the online shop



Product and note images

Applications

Interior Work

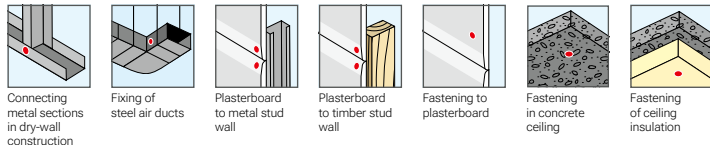

Technical data | Certifications | Other

Technical data

 1.0 + 1.0 Drilling capacity $t_1 + t_2$	 1.0 Drilling capacity t_1	 1.0 Drilling capacity t_2	 max. 1,800 Installation rotation speed	 Screw with swarf-reducing point	 0 - 4 Clamping thickness screw	 16.0 Diameter Hexagon head	 7.5 Diameter Countersunk head	 12.0 Diameter Countersunk head with flange	 12.0 Diameter Pan head	 12.0 Diameter LT Pan head	 12.0 Diameter LT Pan head with cutting ring
 12.0 Diameter Truss head	 12.0 Diameter Flat head	 2.0 Height hexagon head	 13.0 Height LT pan head	 13.0 Height LT pan head with cutting ring	 13.0 Height truss head	 13.0 Height flat head	 4.8 Screw diameter with hexagon head	 4.8 Screw diameter with countersunk head	 4.8 Screw diameter with STS countersunk head	 4.8 Screw diameter with pan head	 4.8 Screw diameter with LT pan head
 4.8 Screw diameter with LT pan head with cutting ring	 4.8 Screw diameter with truss head	 4.8 Screw diameter with flat head	 End mill	 2-Plus Point type	 Wing drill screw	 13.0 Flange head diameter	 5.0 Undercut	 6.3 High thread diameter	 5.0 Length non-threaded part hexagon head screw	 13.0 Length non-threaded part LT pan head screw	 13.0 Length non-threaded part LT-XT pan head screw
 Tool for FR screws with sealing washer	 Tool for screws without sealing washer	 4.9 Diameter left-hand thread	 9.5 Diameter rivet setting head	 1.5 Height rivet setting head	 2.7 Diameter riveting mandrel	 4.8 Diameter rivet shaft	 4.9 Drill hole diameter rivet	 TX white Push-on cap rivet	 XT Centring grommet	 13 Effective shaft length	 8.0 Flat roofing anchor diameter
 50.0 Flat roof stress plate diameter	 15.0 Clamping thickness metal anchor	 M12 Set screw diameter	 M8 Internal thread diameter	 10.0 Threaded sleeve external diameter	 8.0 Insulation support anchor shaft diameter	 90 Insulation support anchor washer diameter	 8.0 Nylon anchor diameter	 8.0 Metal anchor diameter	 T_{inst} Nm 60 Tightening torque	 SDS plus Drive SDS plus®	 4-edge Drill with 4-cutting edge geometry
 [Manufacturer] PGM Masonry Drill Bit Certification Board	 E16 Sealing washer size and material	 H2 Drive cross recess H	 H2 Drive external cross recess H	 Z2 Drive cross recess Z	 Z2 Drive external cross recess Z	 5 Drive internal square	 5 Drive external square	 Triangular Drive external triangular	 SW8 Drive external hexagon	 SW8 Drive internal hexagon	 SW13/TX40 Drive external hexagon/hexalobular
 TX25 Drive hexalobular	 TX25 Drive external hexalobular	 d_{nom} mm 10.0 Nominal drill diameter	 d_0 mm 10.0 Drill hole diameter	 h_1 mm 10 Drill hole depth	 t mm 10.0 Drill hole depth	 h_{nom} mm ≥ 70.0 Nominal embedment depth	 h_{ef} mm ≥ 50.0 Effective embedment depth	 h_v mm ≥ 70.0 Embedment depth	 d_t mm 10.0 Through hole component l	 Slip resistance due to telescopic system	 Slip resistance through support (metal-plastic)
 Slip resistance through support (metal-metal)	 ETB Checked fastening element acc. to ETB guideline	 RC2 Resistance class of burglar-resistant components	 Waterproof	 Protect from moisture	 Rostfrei Stainless steel material	 Suitable for high-strength substructures	 Also available as painted version	 Werte ermittelt durch das Passivhaus Institut Values determined by the Passivhaus Institute	 Fire performance class according to European standard and DIN	 Fire resistant	 Suitability according to seismic performance category
 Top Coating C1000	 Top Coating CLIMADUR	 Top Coating EJO GUARD	 EJO GUARD+ coating	 225.0 Flat roof profile length	 30.0 Flat roof profile width	 7.5 Flat roof profile height					

Certifications



European Technical Assessment



National technical approval abZ



General construction technique permit aBG



National technical test certificate abP



FM Approval product certification by FM Global



Environmental Product Declaration EPD



Emission category according to French VOC directive



International Code Council Evaluation Service



LEED-tested



Certified according to NSF/ANSI 61 drinking water system components

Others



Cross reference to previous page



Cross reference to next page



Online shop



Follow assembly instructions



Video



EJOT SE & Co. KG

Market Unit Construction

In der Stockwiese 35

57334 Bad Laasphe · Germany

T +49 2752 908-0

F +49 2752 908-731

construction@ejot.com

www.ejot.com/construction