

KERI anchor


Perfect refurbishment of three-layer exterior walls by rain screen anchors



Bringing it together.

KERI anchor

Subsequent fixing of rain screens

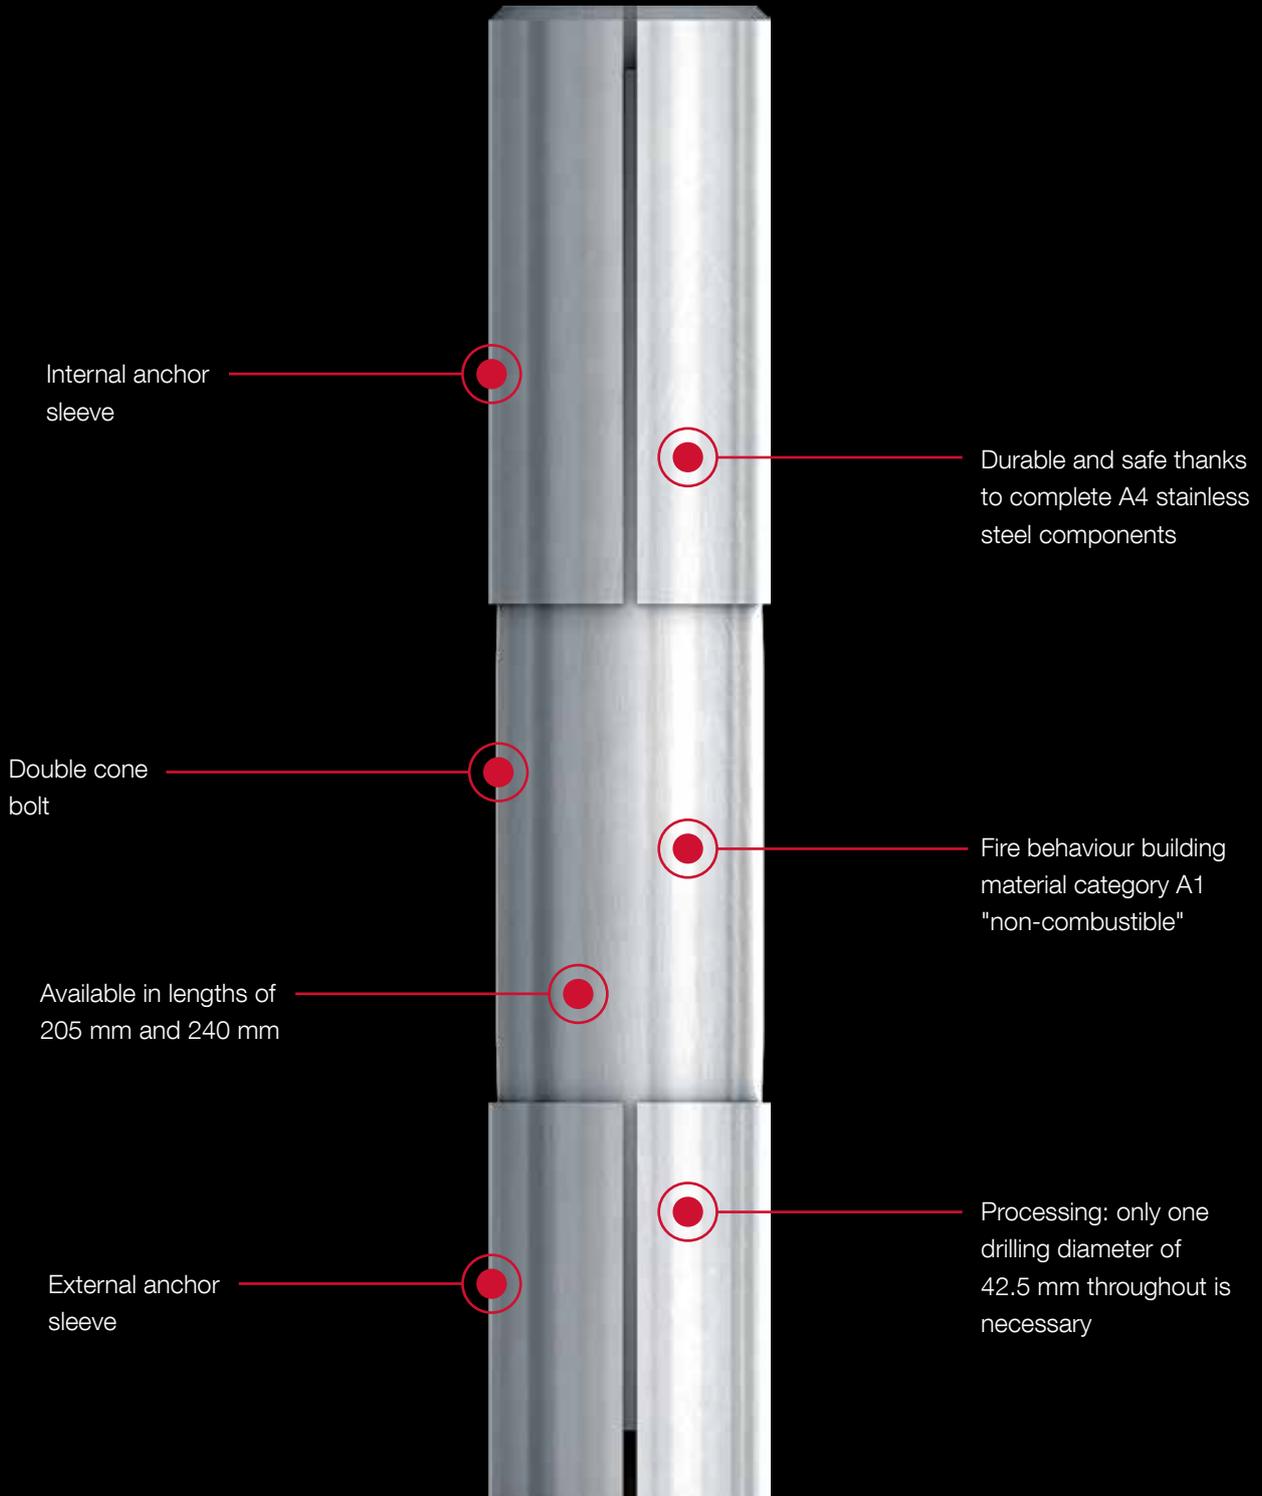

KERI anchor

**Application range**

- > Subsequent fixing of rain screen
- > Horizontal and vertical anchor arrangement

Characteristics


- > A4 stainless steel
- > Immediately resilient

Benefits

- > Easy and quick installation
- > Low noise nuisance to house residents due to core drilling, no hammer drilling
- > Directly loadable thanks to purely mechanical anchoring

Notice

The EJOT service team will gladly assist you.
Phone: +49 351 4 53 67-0

Technical data**Certifications****Technical data**

permitted transverse load load F_0	8.5 kN
Permissible bending moment M_z	1070 Nm

Order description	Length [mm]	diameter [mm]	Fastening thickness $B \leq$ [mm]	PU [pieces]	Price/100 [EUR]	Article number	EAN
KERI-40x205	205	40	128	10	-	9710000205	-
KERI-40x240	240	40	163	10	-	9710000240	-



EJOT SE & Co. KG

Market Unit Construction

In der Stockwiese 35

57334 Bad Laasphe · Germany

T +49 2752 908-0

F +49 2752 908-731

construction@ejot.com

www.ejot.com/construction